

MR series reducer


MR87-NEMA180-81.92-M1-180°-X-Φ2.125"


PRODUCT DATA	
Series	MR
Type	87
Mounting type	Foot-mounted L2／3 design (MR..7)
Power source	NEMA motor
Motor horsepower (HP)	3
Input terminal	PAM (NEMA)＋Motor input
Output speed (r/min)	21
Output torque (lb-in)	8364
Ratio	81.92
Service factor	1.6
Output shaft size	Φ2.125"
Mounting position	M1
NEMA flange code	NEMA180
Motor poles	4
Motor series	General Purpose
Frame	182TC
Frequency (HZ)	60
Motor connection box position	180°
Motor outlet position	X

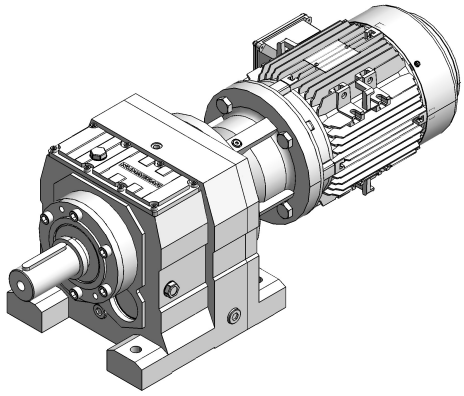


Head Office: **905.829.1001**
Toll Free: **1.888.286.1820**

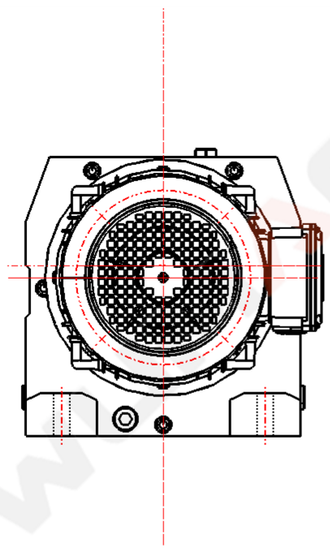

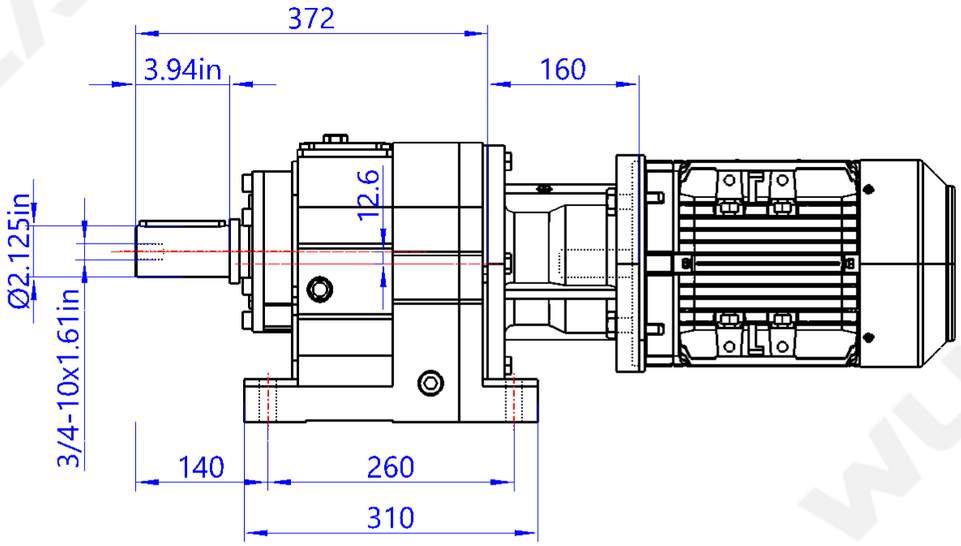

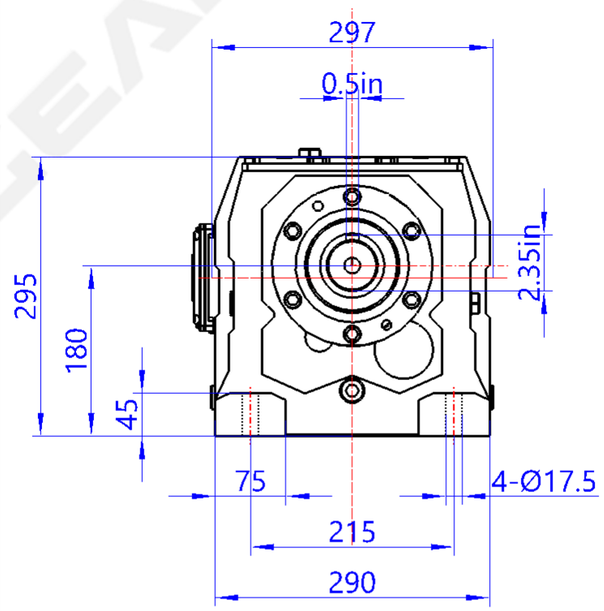

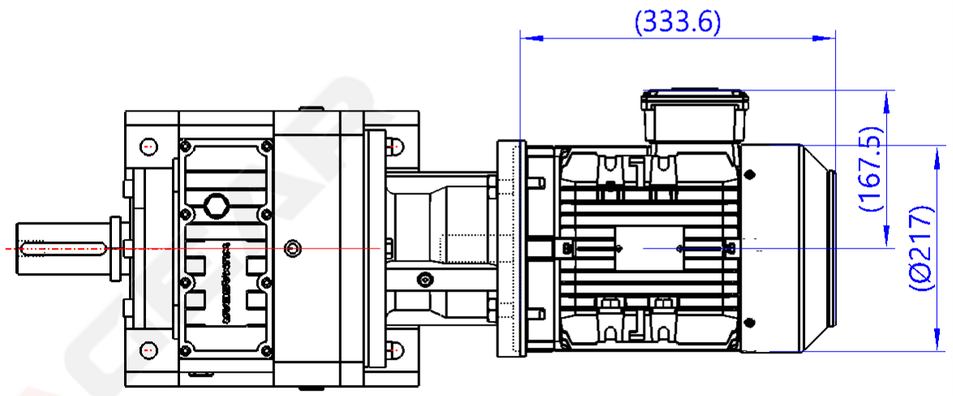

Motor power	
Motor pole	4
Speed ratio of reducer	81.92
0utput speed	21r/min
Output torque	8364lb-in
Service factor	1.6

The motor size is for reference only. For accurate values, please contact us separately.

WUMAGEAR

MR series reducer

MR87-NEMA180-81.92-M1-180°-X-Φ2.125"